






FIRE RATING

-  UL listed
-  ITS Warnock Hersey listed
-  10C Classified

SMOKE PERFORMANCE

 The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

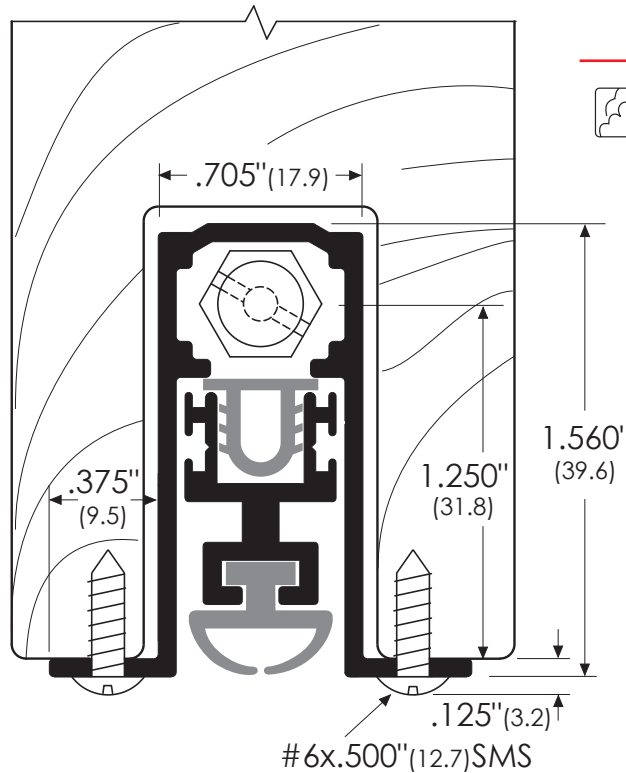

Legend:

A = Aluminum

ANSI/BHMA

#350A

R3B324

	415 Concord Avenue Bronx, NY 10455 tel: 718.585.3230 fax: 718.292.2243 email: zero@zerointernational.com web site: www.zerointernational.com	Part No: 350	
	Notes:	Part Description: Automatic Door Bottom - Mortised / Regular	
Provided By:	Customer Name:	Job No:	Date: