




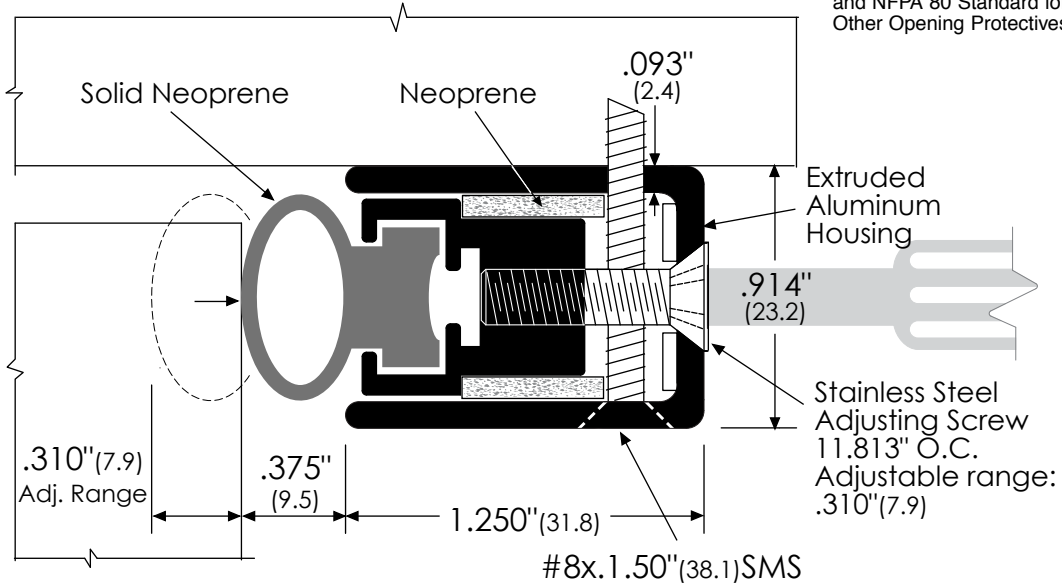


**FIRE RATING**

-  UL listed
-  10B Classified up to 45 minutes
-  10C Classified
-  Category G Listed up to 20 minutes

**SMOKE PERFORMANCE**

 The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives




**ANSI/BHMA**

**Legend:**

AA = Clear Anodized  
D = Dark Bronze Anodized

Head & Jamb #770AA / 770D R3B264  
R3B204

	415 Concord Avenue      tel: 718.585.3230 Bronx, NY 10455      fax: 718.292.2243 email: zero@zerointernational.com web site: www.zerointernational.com		<b>Part No:</b>  770	
	<b>Notes:</b>		<b>Part Description:</b>  Adjustable Sealing System - STC Rated	
<b>Provided By:</b>	<b>Customer Name:</b>	<b>Job No:</b>	<b>Date:</b>	